



**TECHNICAL  
DATA SHEET**

# TC35R

## Standard Modulus TAIRYFIL Carbon Fiber

- TAIRYFIL carbon fiber produced from polyacrylonitrile-based precursor.
- High strength, standard modulus, never twisted carbon fiber available with excellent processability for different applications, especially cost reduction due to large tow.

### ■ Fiber Properties


Tow sizes	Yield (g/1000m)	Tensile Strength		Tensile Modulus		Elongation (%)	Density (g/cm <sup>3</sup> )	Sizing Type	Sizing Content (%)
		Ksi	MPa	Msi	GPa				
12K	800	580	4000	35	240	1.7	1.8	Epoxy	1.0-1.6
24K	1600								
48K	3200								

1. Test Method : JIS-7608
2. Carbon fiber could be produced with V sizing (compatible with vinyl ester resin).
3. The sizing content could be customized.

### ■ Packing Standard

- Dimensions are defined as follow :

- a = diameter of bobbin
- b = external diameter of tube
- c = internal diameter of tube
- d = length of tube
- e = length of bobbin

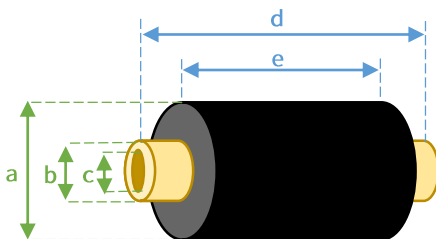

Type	Tow sizes	Fiber Weight (kg)	Bobbin Size (mm)					Bobbin Per Case	Case Net Weight (kg)
			a	b	c	d	e		
TC35R	12K	4	155-165	84.8-85.2	76.8-77.2	275-285	245-260	6	24
	24K	4	155-165	84.8-85.2	76.8-77.2	275-285	245-260	6	24
	48K	8	205-220	84.8-85.2	76.8-77.2	275-285	245-265	3	24



## Contact

### TAIRYLAN DIVISION, FPC

**● Sale Department**  
 Room 175, 4F, No.201, Tung HWA N RD.,  
 Taipei, Taiwan

**● Sales Representative**  
 Larry Hung    larryhung@fpc.com.tw  
 Cliff Huang    cliffhuang@fpc.com.tw  
 Allen Tsai    allentsai@fpc.com.tw  
 Norton Yang    southboy@fpc.com.tw