



TECHNICAL
DATA SHEET

TC33

Standard Modulus TAIRYFIL Carbon Fiber

- TAIRYFIL carbon fiber produced from polyacrylonitrile-based precursor.
- High strength, standard modulus, never twisted carbon fiber available with excellent processability for different applications.

Fiber Properties


Tow sizes	Yield (g/1000m)	Tensile Strength		Tensile Modulus		Elongation (%)	Density (g/cm ³)	Sizing Type	Sizing Content (%)
		Ksi	MPa	Msi	GPa				
1.5K	100	500	3450	33	230	1.5	1.8	Epoxy	1.0-1.6
3K	200								
6K	400								

1. Test Method : JIS-7608
2. Carbon fiber could be produced with different sizing (compatible with thermoplastic resin).
3. The sizing content could be customized.

Packing Standard

- Dimensions are defined as follow :

- a = diameter of bobbin
- b = external diameter of tube
- c = internal diameter of tube
- d = length of tube
- e = length of bobbin

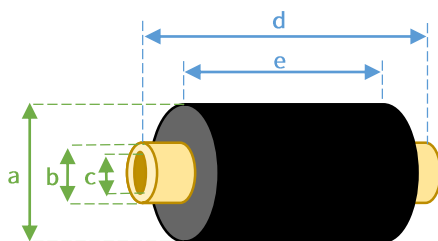

Type	Tow sizes	Fiber Weight (kg)	Bobbin Size (mm)					Bobbin Per Case	Case Net Weight (kg)
			a	b	c	d	e		
TC33	1.5K	0.5	105-115	84.8-85.2	76.8-77.2	275-285	230-245	20	10
	3K	1	110-120	84.8-85.2	76.8-77.2	275-285	230-245	20	20
	6K	2	127-137	84.8-85.2	76.8-77.2	275-285	230-245	12	24



Contact

TAIRYLAN DIVISION, FPC

● **Sale Department**
Room 175, 4F, No.201, Tung HWA N RD.,
Taipei, Taiwan

● **Sales Representative**
Larry Hung larryhung@fpc.com.tw
Cliff Huang cliffhuang@fpc.com.tw
Allen Tsai allentsai@fpc.com.tw
Norton Yang southboy@fpc.com.tw